


DESCRIPTION




Slats joined transversely by a rear slat and available in different widths (A, B) and separations (C).

It is possible to place registrable panels of simple handling.

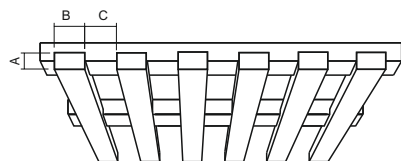

ACOUSTIC TEST

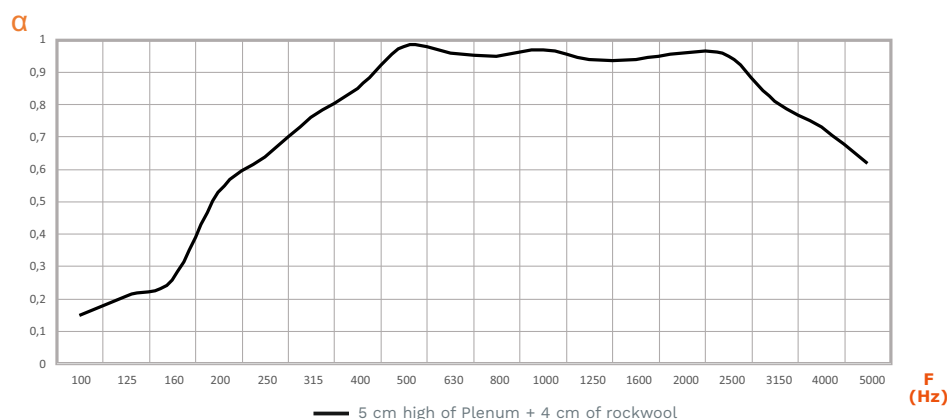

STUDIED DATA

Sizes: 1935X600 mm

Slats: 22 x45 mm

7 units. (Rear: 4 units)

Weight: 7.73 kg

Density: 490 kg/m³

Medium absorptive coefficient

$\alpha_m = 0.95$

Average absorptive coefficient

$\alpha_w = 0.85$

Noise reduction coefficient

NRC = 0.90



Test Sample.

TECHNICAL FEATURES

Sizes	2380x600 (22x45/68) mm Other: contact us.
Tolerances	Width: ± 1.5 mm ; Length: ± 1.5 mm.
Finishing material	Lacquered pinewood (natural or stained lacquered). Other: contact us.
Water-resistant	Ask for properties.
Fire-rated	UNE 13501: B-s1,d0 Autoclave treatment.

*Ask for other finishes or sizes.


ADDITIONAL FEATURES

Washable Product	Clean with a damp cloth. Do not use chemical agents.
Impact Resistance	Depends on the support material.
Scratching Resistance	Depends on the finishing material.
Dirt Proof	High resistance to dirt. May vary with the finishing material.
Recyclable	Environmentally friendly.
Earthquake-resistant	Possible to install an anti-seismic system.

INSTALLATION STANDARD SYSTEM


Walls

Angular metallic with hardware.



Suspended ceilings

Angle threaded rod and nut, tightening gauge, "T" profile and hanging piece.



PRODUCT REMARKS

The goods should be stored in the jobsite at least 24h prior to the installation. The temperature must be between 18° and 25° and the relative humidity between 40% and 60%.